

Kelin epoxy tile joints adhesive is a new upgraded product after colorful waterborne epoxy tile grout, it not only retains the texture of colorful waterborne epoxy tile grout, upgrades the product performance, but also makes construction easier and more convenient. Soft texture, greatly shows your low-key luxury decorative style. Varieties of colors, make your decoration place sparkling. Eco-friendly epoxy resin subbase course let your product more waterproof, wear-resistant, mould proof and moisture proof. Natural sand calcined at high temperature makes the color more natural and beautiful and never fades. Also, it is as bright as porcelain after cluing without yellowing or decolorizing. In addition, the joint surface looks perfect fit to the ceramic tile, just like nature itself.

<b>Main Ingredient</b>	Epoxy resin, High-end color powder
<b>Function</b>	The filling and beautification of tile gap
<b>Shelf Life</b>	Stock in a cool and dry place at 0-37 °C for 12 months
<b>Net Weight</b>	450 ML
<b>Packing</b>	30 Sets/Carton

The product can be better used in the joints of ceramic tile, stone, glass, mosaic tile on the wall or flour in bathroom, kitchen, bedroom and so on. Australia joint research and development products to make the better performance, and through the Chinese Academy of Sciences strategic quality control guidance, to make products' quality stable. Kelin [China epoxy tile grout suppliers](#) to provide you with quality products.



**Varieties of colors for your choice. Also provide custom colors.**

Gray 1#

Gray 2#

Gray 3#

Gray 4#

Gray 5#

Gray 6#

Gray 7#

Gray 8#

Gray 9#

Cement Gray

Dull Gray

Silver Gray

Metal Gray

Luxury Silver

Glacier White

Calaeatta

Pearl Gold

Slate Gray

Terra Brown

Greyish Green

Yellow Gray

Soft Khaki

Yellowish Brown

Olive Brown

Brownness

Dark Brown

Reddish Brown

Rock Bslack



Provide Whole Room Gap Solution



### Brief Construction Process






Clean the tiles and keep it dry.

Polish with tile wax except the glazed tile.

Open & Watch, both sides can extruded meanwhile.

Screw on the nozzle, put on the grout gun.

Inclined cut the top of the nozzle in 45°.

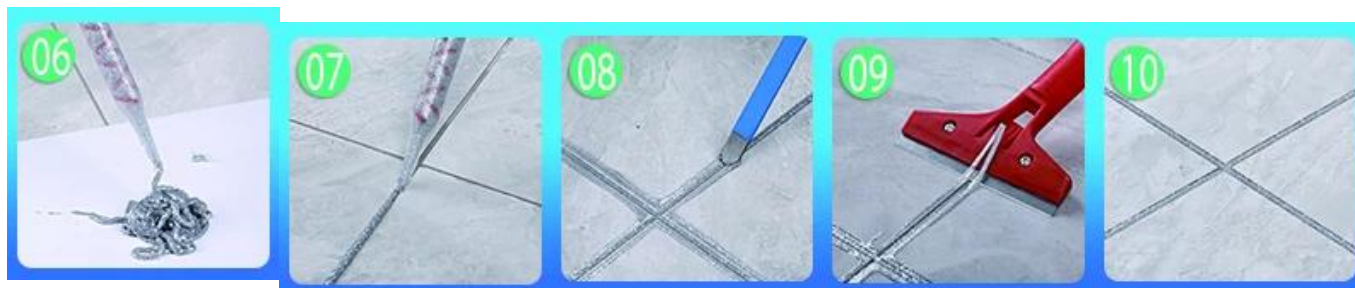

Squeeze out 60-80cm long grout in the forepart.

Evenly squeeze out the tile agent along the gap.

Press the grout with professional glue-press tools.


Don't touch in 4-5 hours and remove excess grout then.

Keep the tiles dry in 24 hours.

### Professional Joint-Pressing Tool



Two Component Caulking Gun

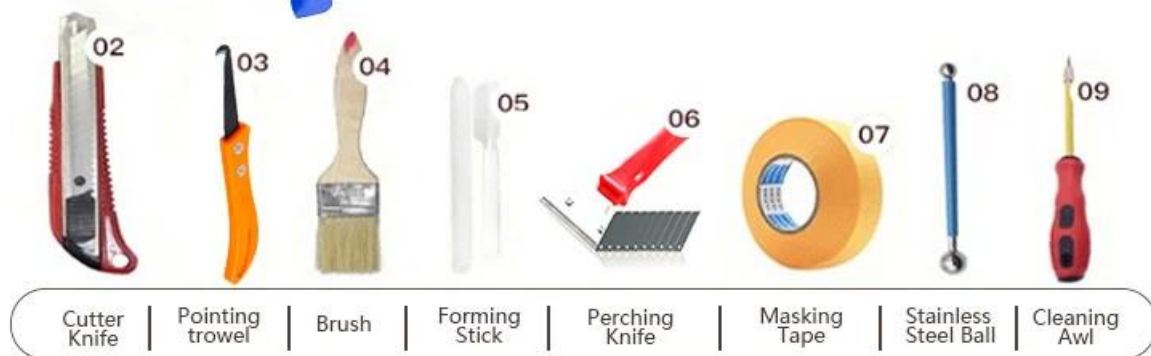

### Company Advantage



### Factory Overview



Creaming Machine Line

Testing Machine

Batching Production Line

Cooling Filing



Filling Machine Line

Film-coated Machine

Real Material Stock

Stock

### Certification

